

9100 Series High Resolution Analog/IP Camera



True day/night mini-dome camera with built-in microphone for mobile video surveillance



OVERVIEW

The MobileView® 9100 Series Mini-Dome Camera is the ideal choice for providing high-definition images in mass transit surveillance applications. The mini-dome camera comes with flexible lens options, built-in microphone and both 12VDC or PoE power options to simplify analog or IP installations. The camera offers true day/night functionality and built-in Infrared Illuminators to capture images in low light scenarios to ensure high image quality even in the most challenging transit environments. Tri-streaming capability allows users to easily configure and optimize bandwidth and storage settings according to needs. Users can configure the camera to generate three separate H.264 streams simultaneously.

STANDARD FEATURES

- Up to 2.0 Mpx
- Simultaneous analog and IP video outputs
- H.264 compression technology with tri-streaming capability with independent settings
- True day/night functionality and built-in infrared illuminators for capturing images in various lighting scenarios
- Built-in microphone
- 32GB Micro SD Card included in 9102 models
- Flexible power options to simplify installation with PoE or 12VDC
- Fully adjustable mounting bracket available for forward-facing position
- Low-profile, rugged design
- IP66 and IK07 rating

9100 Series High Resolution Analog/IP Camera

True day/night mini-dome camera with built-in microphone for mobile video surveillance

Specifications

Camera

Sensor (1.3Mpx Camera)	1.3Mpx 1/3" Progressive Scan CMOS
Sensor (2.0Mpx Camera)	2.0Mpx 1/3" Progressive Scan CMOS
IP Compression/Standard	H.264
Maximum Resolution @ FPS (1.3Mpx Camera)	1280x960 (25fps/30fps)
Maximum Resolution (2.0Mpx Camera)	1080p
Resolution	Analog: 520+ TVL IP Alarm Stream (1.3Mpx Camera): max 960p/XVGA @ 30fps IP Alarm Stream (2.0Mpx Camera): max 1080p/XVGA @ 30fps IP Primary Stream: max 720p @ 15fps IP Alternate Stream: max 4CIF @ 15fps
Frame Rate	50Hz: 25fps (1280 x 960), 60Hz: 30fps (1280 x 960)
S/N Ratio	50dB
Electronic Shutter	50Hz: 1/25s~1/100,000s, 60Hz: 1/30s~1/100,000s
Certification	FCC, RoHS

Lighting Performance

Wide Dynamic Range (1.3Mpx Camera)	70 dB
Wide Dynamic Range (2.0Mpx Camera)	120 dB
Digital Noise Reduction	3D
Day/Night	IR cut filter with auto switch
White Balance	Yes, Auto 200K to 10,000K
Active Gain Control	Yes, Auto
Motorized IR Cut Filter	Yes
Color Sensitivity (1.3Mpx Camera)	0.5 Lux at 70 IRE (f1.2, AGC On)
Color Sensitivity (2.0Mpx Camera)	0.01 Lux at 70 IRE (f1.2, AGC On)
B/W Sensitivity	0 Lux at 70 IRE (f1.2, AGC On)
IR Range	Up to 10m, Smart IR

Housing

Camera Type	Low Profile Dome Camera
Ratings	IP66 & IK07
Outdoor	Yes
Vandal Resistant	Yes

Lens

Control Type	Fixed
Focal Length	2.8, 4.0, 6.0, 8.0mm
Varifocal	No

Power

Voltage Input & Power Consumption	12V Power Source: 4W, maximum
PoE	PoE Power Source: 5W, maximum
	PoE (802.3af)

Other

Special Feature	3-axis adjustment
-----------------	-------------------

Network

Bit Rate	64 Kbps-6Mbps
Network Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos, IPv6
Interoperability	ONVIF (Profile S), PSIA, CGI

Audio

Audio Processing	Codecs: G.711 mu-law, G.726
Audio Sensitivity	-25 dBV
Audio S/N	62 dB at 94 dB Sound Pressure Level, minimum


Mechanical/Environmental

Dimensions	99 x 97 x 53mm
Weight	14 oz (407 g)
Operating Temperature	-20°C to +60°C (-4°F to 140°F)
Audio/Power Connector	Molex 39-01-4036 (Pin 1 is Power +12V, Pin 2 is Ground, Pin 3 is Audio)
PoE & IP Audio	RJ45

Ordering Information

MVC-9100-28-WI	Mini-Dome Camera w/Audio, 1.3Mpx, IP/Analog, True D/N, IR, 2.8mm Lens, 12VDC/PoE, White
MVC-9100-28-BK	Mini-Dome Camera w/Audio, 1.3Mpx, IP/Analog, True D/N, IR, 2.8mm Lens, 12VDC/PoE, Black
MVC-9100-40-WI	Mini-Dome Camera w/Audio, 1.3Mpx, IP/Analog, True D/N, IR, 4.0mm Lens, 12VDC/PoE, White
MVC-9100-60-WI	Mini-Dome Camera w/Audio, 1.3Mpx, IP/Analog, True D/N, IR, 6.0mm Lens, 12VDC/PoE, White
MVC-9100-80-BK	Mini-Dome Camera w/Audio, 1.3Mpx, IP/Analog, True D/N, IR, 8.0mm Lens, 12VDC/PoE, Black
MVC-9100-FF-BRKT	MVC-9100 Forward-facing Camera Mount Bracket, Black
MVC-9100-28-BK-FF	FF Mini-Dome Camera w/Audio, 1.3Mpx, IP/Analog, True D/N, IR, 2.8mm Lens, 12VDC/PoE, Black
MVC-9102-28-WI	Mini-Dome Camera w/Audio, 2MP, IP/Analog, True D/N, IR, 2.8mm lens, DC 12V 0.3A/POE 0.1A, 32GB, White
MVC-9102-28-BK	Mini-Dome Camera w/Audio, 2MP, IP/Analog, True D/N, IR, 2.8mm lens, DC 12V 0.3A/POE 0.1A, 32GB, Black
MVC-9102-40-WI	Mini-Dome Camera w/Audio, 2MP, IP/Analog, True D/N, IR, 4.0mm lens, DC 12V 0.3A/POE 0.1A, 32GB, White
MVC-9102-60-WI	Mini-Dome Camera w/Audio, 2MP, IP/Analog, True D/N, IR, 6.0mm lens, DC 12V 0.3A/POE 0.1A, 32GB, White
MVC-9102-80-BK	Mini-Dome Camera w/Audio, 2MP, IP/Analog, True D/N, IR, 8.0mm lens, DC 12V 0.3A/POE 0.1A, 32GB, Black

Dimensional Diagrams

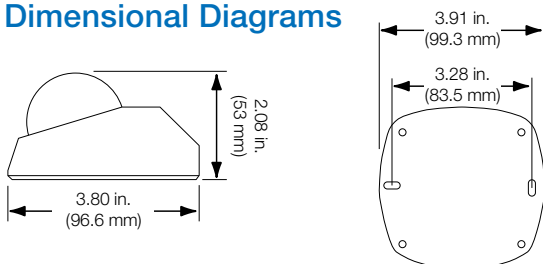

interlogix.com/mobileview

Specifications subject to change without notice.

© 2016 United Technologies Corporation.
All rights reserved.

All trademarks are the property of their respective owners.
Interlogix is part of UTC Climate, Controls & Security
a unit of United Technologies Corporation.

2016/08 (LI-2028)