

Information is subject to change without notice. For the latest version, please check Safe Fleet Community (<https://community.safefleet.net>).

The RGY Button's tri-color LED light ring provides recorder system status, and indicates video loss conditions. The button activates an alarm/event input to mark video. The RGY Button is compatible with TH8, NH16, and DH series recorder platforms.




Typical Installation Package


- RGY Button with 5 ft./1.5m pigtail (part # 065-1010)



- RGY extension harness (20ft./6m) (part # 060-1197)




- Button & Signals harness (part # WT2)



Recorder Configuration

1. Power up the recorder with a monitor and USB mouse connected, then right-click in Live view and select **Configuration**.
2. Select **System** to open System Settings.
3. In the **Diagnostic Indicator** drop-down menu, select **RGY Button**.

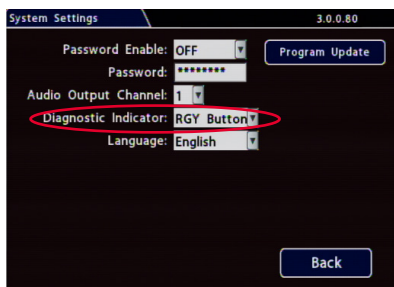

4. Click **Back** to save changes..

Installation Procedure


1. Determine the proper location before drilling



the mounting hole. Ensure the area behind the hole is clear of obstructions before drilling.

2. Drill a $\frac{3}{4}$ " hole in the desired location. File the edges if necessary.
3. Remove the mounting nut from the button as shown.
4. Feed the connector and the cable through the mounting hole, and re-attach the nut.
5. Connect the RGY Button's 5-pin connector to the RGY extension harness (060-1197),
6. Connect the extension harness to the Button & Signal harness' (WT2) 5-pin connector.
7. Connect the WT2's 2x6 Microfit to the **SIGNALS** socket on the recorder.
8. Set up the recorder for the RGY Button (see "Recorder Configuration").

RGY Button - Status Light Indicators



Color	Recorder Status	Examples
Green	Recording/normal – no video loss from any camera; no problems with recording operation	Routine operations, including: <ul style="list-style-type: none"> • recording • warming up/booting • shutting down
Yellow	Recording/video loss – recording, but experiencing video loss from one or more cameras	Video loss on any or all channels ¹
Red	Not recording – system unable to record due to an abnormal condition	Not recording due to: <ul style="list-style-type: none"> • overheating • drive unlocked • drive failure² • other abnormal conditions

¹ If the system is experiencing video loss *and* not recording, the red light displays.

² On systems with primary storage consisting of dual media, both media must fail.

💡 TIP: Status light colors

Vehicle operators should check that the recorder status light turns solid green approximately two minutes after vehicle ignition is on.

A yellow or red status light should be reported to a supervisor, and indicates the system requires attention.

💡 TIP: Event button - tagging video

For information about using the Event button to flag an event, see “Tagging Video for Review” in the recorder’s *Installation and Configuration Guide* on the Safe Fleet Community.

Service & Support

If your RGY Button is to be returned for service, please contact the Safe Fleet technical support team, provide the part and/or serial # of your unit, and ask for a **Return Merchandise Authorization (RMA)** number.

An **RMA #** allows the support team to better track your product when it comes in for service. Please show the RMA # on the **outside** of the package.

ANY PRODUCT SENT WITHOUT AN RMA# MAY BE REFUSED!

Documentation and Warranty

Additional copies of this guide along with other documentation can be found on the Safe Fleet Community website: <https://community.safefleet.net>. For full warranty information, visit: <https://www.safefleet.net/product-and-service-warranties/>.

Technical Support

Phone: 1.844.899.7366

Email: PTsupport@safefleet.net