



A Safe Fleet Brand

GPS4 Magnet Mount

Quick Installation Guide



1 Features

- Based on SiRFstarIV™ GSD4e low power single chip
- High sensitivity (tracking sensitivity -163 dBm)
- Low Current Consumption (30mA) at continuous tracking
- Dimensions 1.4 × 1.7 × 0.6 in (36 × 42 × 15 mm)

2 Installation


- 1 Determine the mounting location for the GPS receiver. For best signal reception, place it close to the windshield edge with the blue LED facing up.

Important

Ensure that the location selected to mount the GPS receiver (either concealed or safe surface mount) allows for the running of wiring towards the DVR.

- 2 Mount the GPS magnet mount on a ferrous metal surface.
- 3 Connect the GPS connector to the GPS receiver connector.

- On the TL-HD, TX8 and TL4/TL2 DVRs, the connector is on the DVR's back panel. See Figure 1.

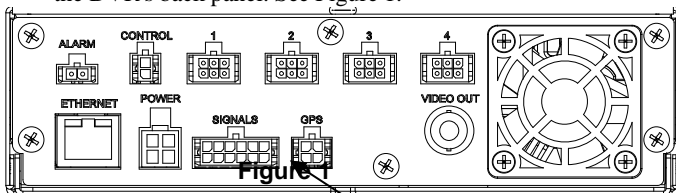

GPS receiver connector on TL4

- On the MX-HD and DX-HD DVRs, connect the GPS to the GPS receiver connector on the Smart-Link module. See Figure 2.

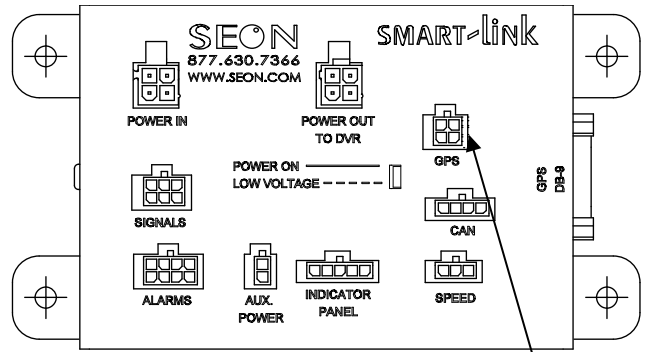


Figure 2

GPS receiver connector

3 Configure GPS to On

In the DVR Configuration menus, go to Alarms/Signals > Speed and set Speed Display to GPS. Click Back to save and exit.



Service and Warranty

If your GPS4 Magnet Mount is to be returned to Seon Design for service, please call toll free 1-877-630-7366, or 604-941-0880, provide the model and/or serial number of your unit, and ask for a Return Authorization (RA) number. An RA number allows the Service Technicians to better track your product when it comes in for service. Please show the RA number on the outside of the package. **ANY PRODUCT SENT TO SEON DESIGN WITHOUT AN RA NUMBER MAY BE REFUSED.**

Please refer to the Warranty form provided with your product to review the terms of warranty service, contact and shipping information, as well as other important issues regarding the service and operation of your product.

Information in this guide is subject to change without notice.

© April 2015 Seon Design Inc. All rights reserved.

www.seon.com Part Number: 700-0111 R4

